


How to order



VG Order reference

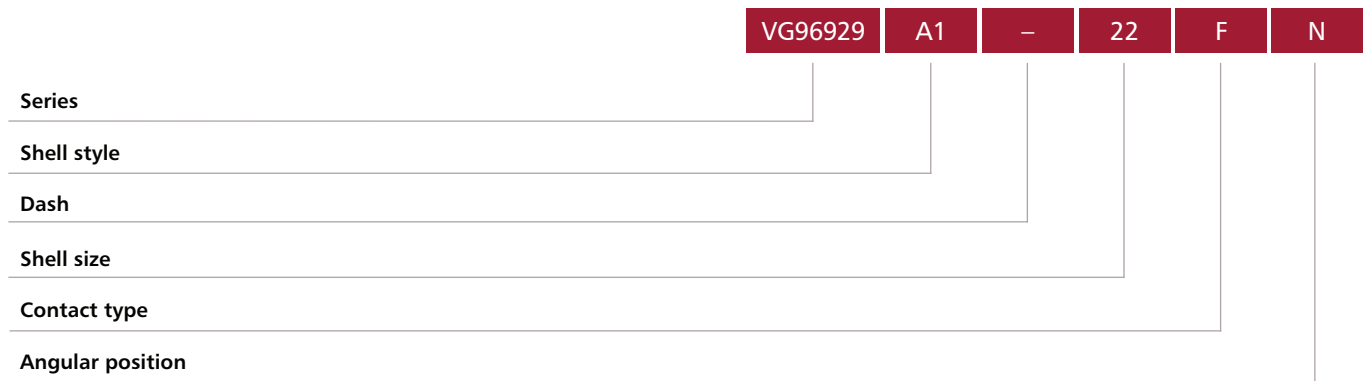

Explanation

Series

VG96929

Shell style

A1, A2 - box mounting receptacle

B1 - wall mounting receptacle

F, G - straight plug

C1, C2 - bulkhead

E - plug 90°

Shell size

16, 18, 22, 28, 32.

Contact type

F = Spring contact (pin)

Z = Cylinder contact (socket)

D = Cylinder-spring contact (Style C1 and C2 only)

Angular position

N - 180°

W - 120°

Cannon Order reference

	CGE	6	E	32	H24	F	W	B	*
Series									
Shell style									
Class									
Shell size									
Contact size									
Contact type									
Angular position									
Bayonet coupling									
Modification									

Explanation

Series

CGE

Shell style

- 0 - wall mounting receptacle with flange
- 1 - cable connecting plug
- 2 - box mounting receptacle with flange
- 6 - straight plug
- 8 - plug 90°
- 9 - bulkhead

Class

E - environment, Degree of protection IPX8

Shell size

16, 18, 22, 28, 32

Contact size

- H2 - 25 mm²
- H5 - 50 mm²
- H9 - 95 mm²
- H15 - 150 mm²
- H24 - 240 mm²

Contact type

- F = Spring contact (pin)
- Z = Cylinder contact (socket)
- X = Cylinder-spring contact (Style 9 only)

Angular position

N - 180°

W - 120°

Bayonet coupling

B - bayonet coupling

Modification

- 03 - adapter for heat shrink boots, metric crimp contact
- 04 - rear panel mounting, threaded holes in flange, metric crimp contact
- 05 - rear panel mounting, through holes in flange, metric crimp contact
- 14 - shielded version, metric crimp contact
- 16 - thread bolt termination, front panel mounting, O ring for sealing



Dimensions shown in mm
Specifications and dimensions subject to change

www.ittcannon.com