


| | | Body Style | Contact Gender | Contact Size | Gland Nut | Body Color |
|--|-------------|----------------------------|----------------|--------------|-----------|------------|
| | Example = | SNLM | P | C50 | 25L | GN |
| Description | Code | | | | | |
| Panel Male - M12 post fixing | SNPM | } | } | } | } | } |
| Panel Female - M12 post fixing | SNPF | | | | | |
| Panel Female with Cable Fixing | SNPFL | | | | | |
| Cable Male - cable fixing | SNLM | | | | | |
| Cable Female - cable fixing | SNLF | | | | | |
| Male Contact (pin) use with SN..M | P | | | | | |
| Female Contact (skt) use with SN..F | S | | | | | |
| Crimp 70mm ² Copper Cable | C70* | } | } | } | } | } |
| Crimp 50mm ² Copper Cable | C50* | | | | | |
| Crimp 35mm ² Copper Cable | C35 | | | | | |
| Crimp 25mm ² Copper Cable | C25 | | | | | |
| Set-Screw 70mm ² Copper Cable | S70* | | | | | |
| Set-Screw 50mm ² Copper Cable | S50* | | | | | |
| Set-Screw 35mm ² Copper Cable | S35 | | | | | |
| Set-Screw 25mm ² Copper Cable | S25 | | | | | |
| Threaded Post (Panel Mount) | TP | | | | | |
| Gland nut 10-14mm Ø | 25S | } | } | } | } | } |
| Gland nut 13-18mm Ø | 25L | | | | | |
| | | Cable fixing versions only | | | | |
| Red | R | } | } | } | } | } |
| Black | BK | | | | | |
| Green | GN | | | | | |
| Blue | BL | | | | | |
| Brown | BN | | | | | |
| Grey | GY | | | | | |
| White | W | | | | | |
| Yellow | Y | | | | | |

⚠ WARNING

IMPORTANT SAFETY INFORMATION

Standard PowerLock and SnapLock contact are copper based contacts, they should not be used for direct termination onto aluminum cables as galvanic corrosion and overheating can occur. If you intend to use aluminum cables please contact ITT for advice on alternatives to the standard copper contacts.

*C50, C70, S50 and S70 contacts can only be used with gland nut 25L

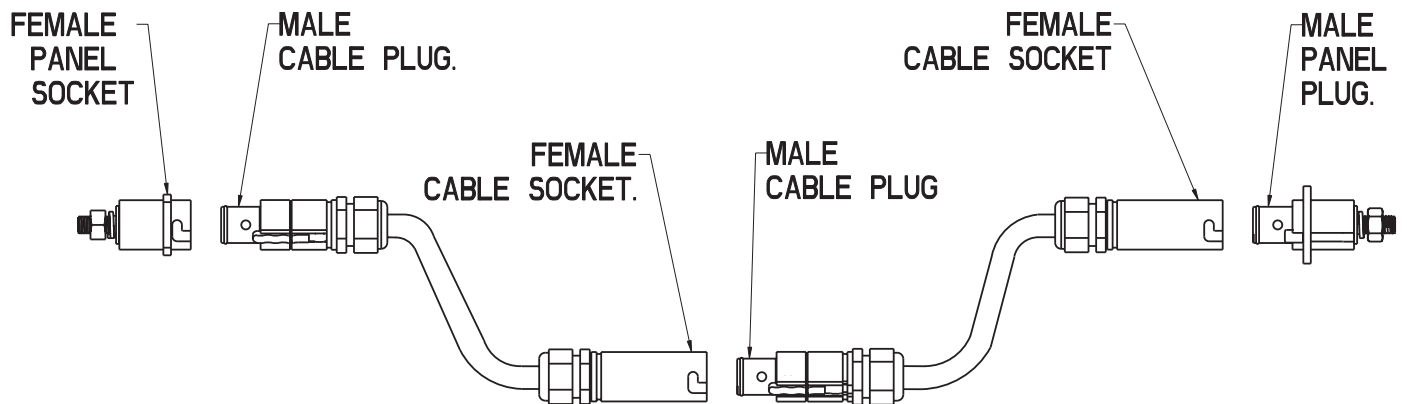

Specifications and dimensions subject to change

www.ittcannon.com