

26 PC-Kontaktbohrungen Ø1+0,1

Ansicht ist auf der Steckseite Stift-Stecker gezeichnet.

Fuer Steckseite Buchsen-Stecker ist das Bohrbild spiegelbildlich zur Hauptachse (▼)


Fuer Winkelverdrehung sind die Koordinaten entsprechend umzurechnen

26 PC-contact holes Ø1+0,1

View on mating face of pin-connector

For mating face of socket-connector the hole pattern is symetrically to the main axis (▼)


For angular rotation the coordinates must be changed accordingly

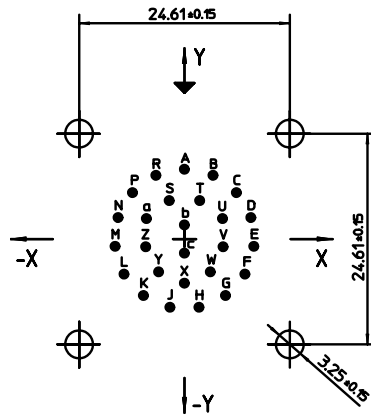

Winkelverdrehung: W = 60°

angular rotations: Y = 275°

Z = 338°



Bohrung hole	Lage / position		Bohrung hole	Lage / position	
	X-Achse X-axis ±0,05	Y-Achse Y-axis ±0,05		X-Achse X-axis ±0,05	Y-Achse Y-axis ±0,05
A	0	8,15	P	-6,07	5,43
B	3,33	7,44	R	-3,33	7,44
C	6,07	5,43	S	-1,78	4,50
D	7,75	2,51	T	1,78	4,50
E	8,10	-0,86	U	4,44	2,39
F	7,06	-4,09	V	4,52	-0,91
G	4,80	-6,60	W	3,02	-3,83
H	1,70	-7,97	X	0	-5,16
J	-1,70	-7,97	Y	-3,02	-3,83
K	-4,80	-6,60	Z	-4,52	-0,91
L	-7,06	-4,09	a	-4,44	2,39
M	-8,10	-0,86	b	0	1,65
N	-7,75	+2,51	c	0	-1,65

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change
Drawings illustrate normal insulator positioning

Material Specification:

Shell Material: Aluminium alloy

Shell Plating: Nickel

Insulator Material: Polychloroprene

Contact Material: Copper alloy

Contact Plating: gold plated

all dimensions are in mm
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for
CUSTOMER



description KPT7A16-26P-EX-A34
Jam nut receptacle
General duty
Solder Pin 0.76 x 7 mm / Pin / Layout: 16-26

© All rights reserved. Reproduction or issue to third in any form
whenever is only permitted with written authorization of ITT Cannon



page 2/2
revision 4153 30. Apr 24