

6 PC-Kontaktbohrungen  $\varnothing 1+0,1$

Ansicht ist auf der Steckseite Stift-Stecker gezeichnet.

Fuer Steckseite Buchsen-Stecker ist das Bohrbild spiegelbildlich zur Hauptachse ( $\blacktriangledown$ )

Fuer Winkelverdrehung sind die Koordinaten entsprechend umzurechnen



6 PC-contact holes  $\varnothing 1+0,1$

View on mating face of pin-connector

For mating face of socket-connector the hole pattern is symmetrically to the main axis ( $\blacktriangledown$ )

For angular rotation the coordinates must be changed accordingly

Winkelverdrehung:  $W = 90^\circ$   
angular rotations:

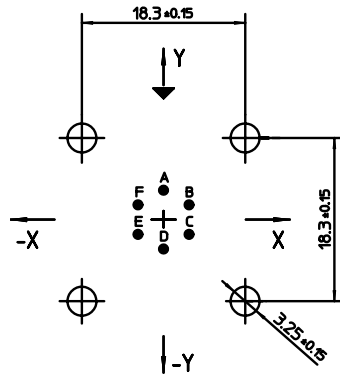

| Bohrung<br>hole | Lage / position                 |                                 |
|-----------------|---------------------------------|---------------------------------|
|                 | X-Achse<br>X-axis<br>$\pm 0,05$ | Y-Achse<br>Y-axis<br>$\pm 0,05$ |
| A               | 0                               | 3,3                             |
| B               | 2,87                            | 1,65                            |
| C               | 2,87                            | -1,65                           |
| D               | 0                               | -3,3                            |
| E               | -2,87                           | -1,65                           |
| F               | -2,87                           | 1,65                            |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

Material Specification:

Shell Material: Aluminium alloy  
Shell Plating: Zinc cobalt, black  
Insulator Material: Polychloroprene  
Contact Material: Copper alloy  
Contact Plating: gold plated

all dimensions are in mm  
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
CUSTOMER



description KPT2E10-6P-EX-A232  
Box mounting receptacle

Solder Pin 0.76 x 7 mm / Pin / Layout: 10-6

© All rights reserved. Reproduction or issue to third in any form  
whenever is only permitted with written authorization of ITT Cannon



page 2/2  
revision 4081 8. Apr 24